


Datasheet: 950mm BTU Tool Shelving

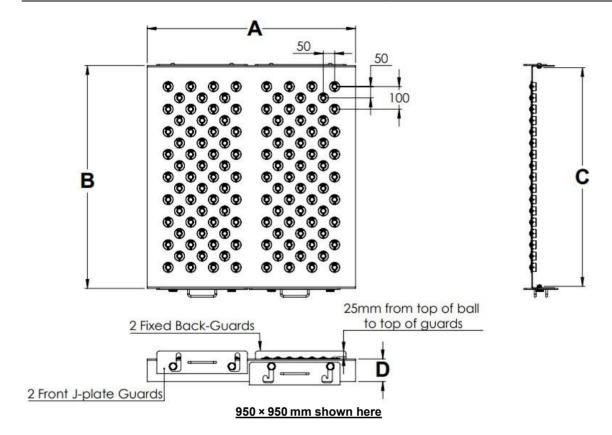

В **BTU Pitch** Quantity of Ball REF No. (Internal Depth) (Width) (Flange Length) spacing units (Depth) 968 920 986 100 120 950 x 950mm 50 x 50 1168 950 x 1150mm 920 1186 100 50 x 50 148

MAXIMUM LOAD -

Maximum Load capacity of 2000 kg evenly distributed with use of three support beams, but subject to the structural integrity of the existing racking

MATERIALS

Shelving – 3mm thick steel Mild Steel

Ball Transfer Unit's – Mild Steel units with Zinc plated coating (522013)

J-Plate Guards – 5mm thick Mild steel with powder coated finish RAL Yellow 1016

Backplate Guards - 5mm thick Mild steel with powder coated finish RAL Yellow 1016

KEY FEATURES

Suited for Pallet Racking

Shelving with ball transfer unit to allow easy storage of tools and Heavy Items

450mm long J-plate guards with handles

For customized specifications—including size, BTU quantity, pitch spacing, and more—or for any further information or general enquiries, please contact us.